

PSS-3000 Optical Sheet | Optical Performance

Optical Clarity

Precision optics, low haze and high light transmission are important properties when considering optical plastics. PSS-3000 optical sheet has the lowest haze and highest transmission of other optical plastics.


PERFORMANCE COMPARISON

MEASUREMENT	UNITS	EQUIPMENT / STANDARDS	PSS-3000	POLYCARBONATE	ACRYLIC
Luminous Transmittance	%	HunterLab UltraScan Pro – D65 / 10°	92	88	92
Haze	%	HunterLab UltraScan Pro – D65 / 10°	0.03	0.22	0.35
Yellowness Index		ASTM E313	0.77	1.28	0.14
Abbe Value			57	29	59

*Testing conducted on 3 mm thick sheets.

Distortion-Free

PSS-3000 optical sheet is virtually free of residual internal stress and strain. PSS-3000 sheet is cast flat with precise thickness control. These properties make it the best choice for devices that require high optical performance such as bar code scanners and optical filters.

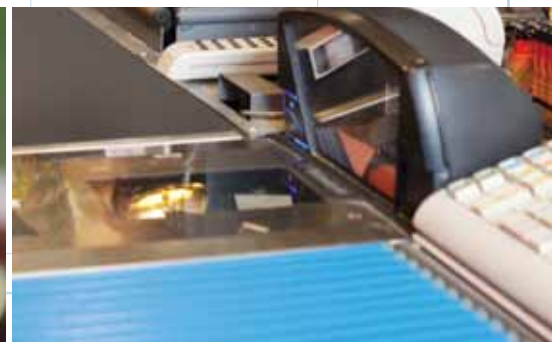

PPG Optical Products
Performance Sheet Solutions